


PLAN VIEW

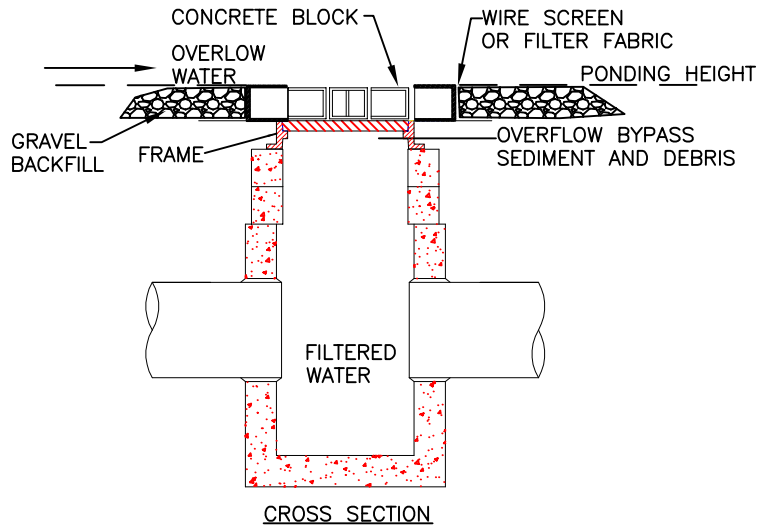

CROSS SECTION

NOTES:

1. DROP INLET SEDIMENT BARRIERS ARE TO BE USED FOR SMALL, NEARLY LEVEL DRAINAGE AREAS (LESS THAN 5%)
2. EXCAVATE A BASIN OF SUFFICIENT SIZE ADJACENT TO THE DROP INLET.
3. THE TOP OF THE STRUCTURE (PONDING HEIGHT) MUST BE WELL BELOW THE GROUND ELEVATION DOWNSLOPE TO PREVENT RUNOFF FROM BYPASSING THE INLET. A TEMPORARY DIKE MAY BE NECESSARY ON THE DOWNSLOPE SIDE OF THE STRUCTURE.

## BLOCK AND GRAVEL INLET PROTECTION

PLAN #



CITY OF LA CENTER APPROVED

*Anthony DeLooper*

4-5-17

CITY ENGINEER

DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:

ER-4