



WHEEL WASH PLAN

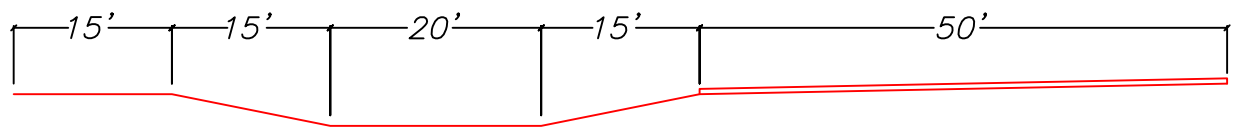

ELEVATION VIEW

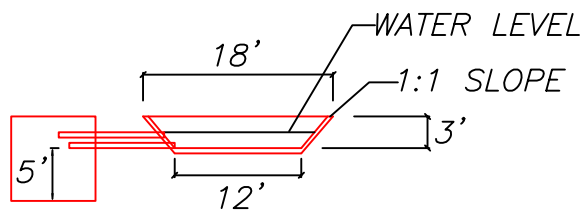

SECTION A-A

LEGEND:

1. ASPHALT CONSTRUCTION ENTRANCE 6 IN. ASPHALT TREATED BASE (ATB).
2. 3 IN. TRASH PUMP WITH FLOATS ON THE SUCTION HOSE.
3. MIDPOINT SPRAY NOZZLES, IF NEEDED.
4. 6 IN. SEWER PIPE WITH BUTTERFLY VALVES. BOTTOM ONE IS A DRAIN. LOCATE TOP PIPE'S INVERT 1 FT. ABOVE BOTTOM OF WHEEL WASH.
5. 8 FT. X 8 FT. SUMP WITH 5 FT. OF CATCH. BUILD SO CAN BE CLEANED WITH TRACKHOE.
6. 6-IN. ASPHALT CURB ON THE LOW ROAD SIDE TO DIRECT WATER BACK TO POND.
7. 6-IN. SLEEVE UNDER ROAD.
8. BALL VALVES.
9. 15 FT. ATB APRON TO PROTECT GROUND FROM SPLASHING WATER.

WHEEL WASH

PLAN #



CITY OF LA CENTER APPROVED

REVISIONS:	DATE:	DRAWN:	DESIGNED:

Barb Stapp, PE 7/23/09

CITY ENGINEER

DATE

ER-5