



NOTE: POND MAY BE FORMED BY BERM OR BY PARTIAL OR OR COMPLETE EXCAVATION

PLAN VIEW

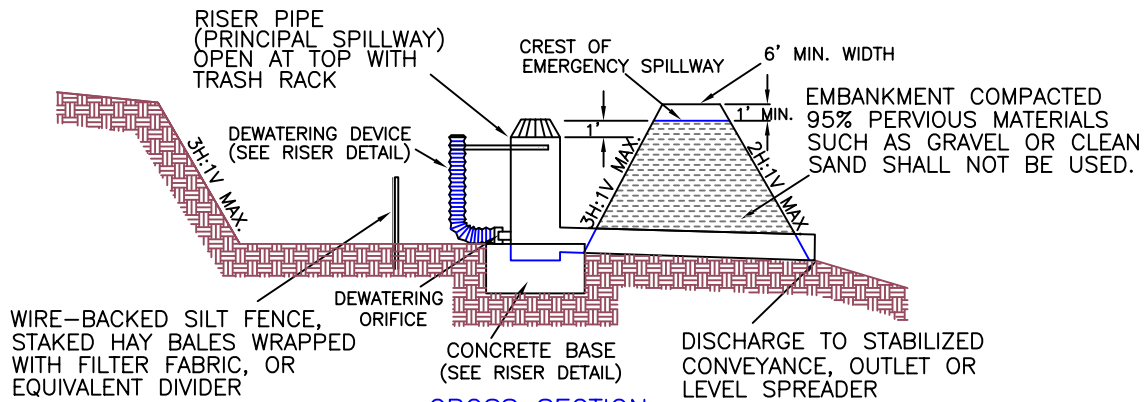

CROSS SECTION

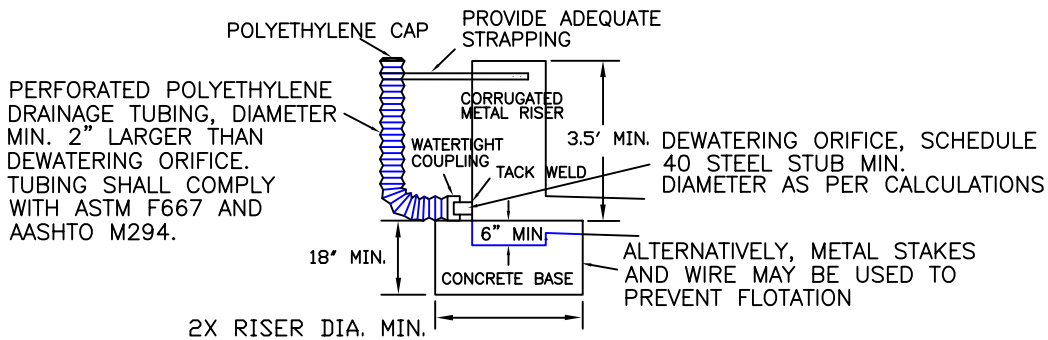

RISER DETAIL

NOTES:

1. STRUCTURES HAVING A MAXIMUM STORAGE CAPACITY AT THE TOP OF THE DAM OF 10 ACRE-FT (435,600 FT³) OR MORE ARE SUBJECT TO THE WASHINGTON DAM SAFETY REGULATIONS (CHAPTER 173-175 WAC).
2. GRADE BOTTOM OF BASIN AS LEVEL AS POSSIBLE.
3. SPILLWAY SHALL BE LINED WITH 2"-4" ROCKS.
4. ALL INLETS AND OUTLETS SHALL BE PROTECTED WITH RIPRAP.
5. IF THE POND POSES A SAFETY HAZARD, IT SHALL BE FENCED.
6. REMOVE SEDIMENT BEFORE 1-FOOT ACCUMULATES.

TEMPORARY SEDIMENT POND

PLAN #



CITY OF LA CENTER APPROVED

REVISIONS: DATE: DRAWN: DESIGNED:

ER-9

Barb Stapp, PE 7/23/09

CITY ENGINEER

DATE