

**SHOULDER ROCK:**

- 0.50 FT. MINIMUM DEPTH (1 1/4" MINUS) CRUSHED ROCK. (CITY APPROVED MATERIAL).
- COMPACTED TO 95% OF MAXIMUM DENSITY. SEE TRENCH ZONE.
- ROCK SHALL EXTEND FROM E.O.P. TO THE BACK OF TRENCH AT APPROX. .05 FT./FT. SLOPE.

**LAWN & LANDSCAPE AREAS:**

- A CITY APPROVED TOP SOIL SHALL BE PLACED 0.50 FT. IN DEPTH.
- AREA TO BE RESTORED TO MATCH EXISTING.

**TRENCH ZONE:**

WHERE THE DISTANCE FROM E.O.T. TO E.O.P. IS LESS THAN OR EQUAL TO THE DEPTH OF THE TRENCH; THESE CONDITIONS SHALL APPLY:

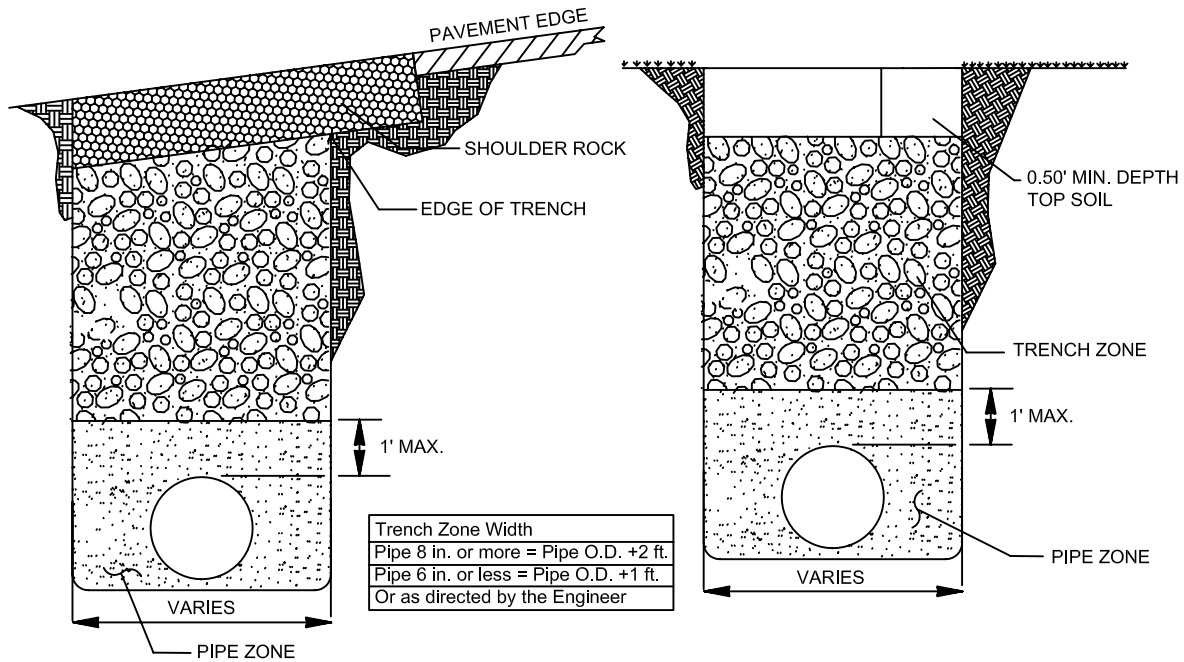
- GRANULAR BACKFILL AS APPROVED BY LOCAL AGENCY OR W.S.D.O.T. SPECIFICATIONS FOR GRANULAR BACKFILL COMPACTED TO 95% OF MAXIMUM DENSITY IN THE TRENCH ZONE USING METHOD C COMPACTION AS PER SECTION 2-03.3 (14)C.
- NATIVE MATERIAL MAY BE USED IF APPROVED PRIOR TO CONSTRUCTION.
- TRENCH ZONE WIDTH -- SEE BELOW.
- SHOULDER ROCK OR LANDSCAPED SECTIONS AS APPLICABLE.

**PIPE ZONE:**

- PIPE ZONE MATERIAL OPTIONAL, OR AS SPECIFIED BY UTILITY OWNER AND APPROVED BY THE CITY.
- 1.0 FT. MAXIMUM FROM TOP OF THE PIPE.



**CONDITIONS:**

- A COPY OF THE ROW PERMIT AND REQUIREMENTS SHALL BE ON THE JOB SITE AT ALL TIMES.
- THE PERMIT HOLDER SHALL BE RESPONSIBLE FOR ALL RESTORATION AND MAINTENANCE OF DITCHES, SHOULDERS, DRIVEWAYS, LANDSCAPING, ECT.
- CALL CITY AT 263-7665 TWENTY-FOUR HOURS PRIOR TO COMMENCING WORK.



**ROADWAY SHOULDER AND LANDSCAPE OPEN CUT UTILITY TRENCH BACKFILL DETAIL**

PLAN #

	CITY OF LA CENTER APPROVED	REVISIONS:	DATE:	DRAWN:	DESIGNED:	ST-19
		1	9/28/10	BES	BES	
CITY ENGINEER						
	DATE					