


PLAN VIEW

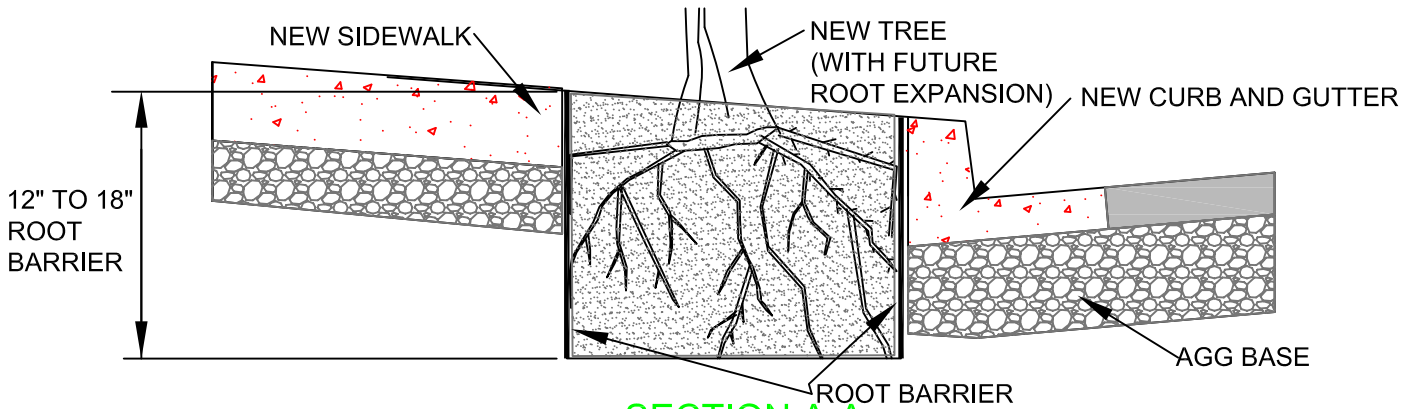

SECTION A-A

CONSTRUCTION NOTES:

- 1 ROOT BARRIER SHALL BE BLACK, INJECTION MOLDED PANELS OR LINEAR ROLL WITH 90-DEGREE DEFLECTING RIBS.
- 2 AT A MINIMUM 12" TO MAXIMUM 18" HIGH ROOT BARRIER.
- 3 ROOT BARRIER SHALL HAVE A MINIMUM WALL THICKNESS OF 0.06" (60 mil) & RIB THICKNESS OF 0.08" (80mil)-THE CONTRACTOR SHALL SUBMIT MANUFACTURER SPECIFICATIONS FOR COMPLIANCE.
- 4 ROOT BARRIER SHALL BE 15' LONG: 7.5' O.C. FROM THE TREE UNLESS APPROVED BY THE CITY.
- 5 ROOT BARRIER SHALL BE INSTALLED VERTICAL ADJACENT TO THE SIDEWALK AND CURB.

TREE ROOT BARRIER INSTALLATION

PLAN #



CITY OF LA CENTER APPROVED

TONY COOPER

CITY ENGINEER

1/29/19

DATE

REVISIONS:	DATE:	DRAWN:	DESIGNED:

ST-31